




MYK LATICRETE

AAC Block Adhesive

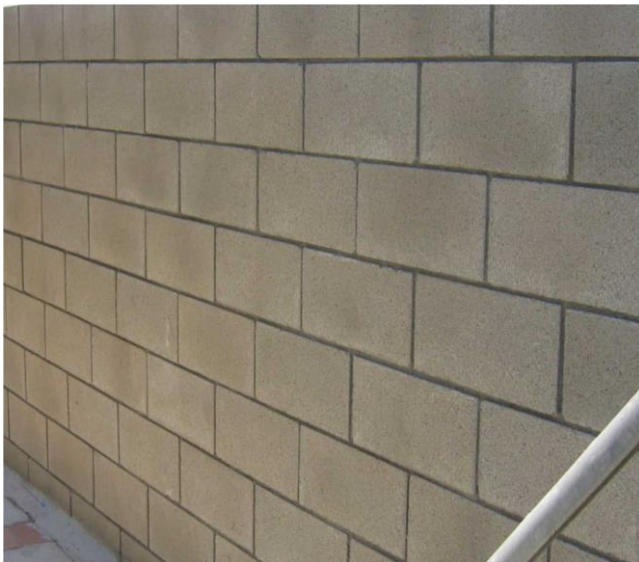

Polymer based block adhesive for laying and construction with AAC Blocks and other light weight masonry units

Features / Benefits

- Improved bond strength
- No curing required after block work is done
- Flexible, shock & impact resistant
- Optimum compressive & splitting tensile strength
- Easy to use
- Long working time
- Fast & economical
- Stronger adhesion
- Consistent quality
- Superior / Advanced Technology
- Longer pot life
- Reduces wastage

Application

For interior and exterior use for construction with thin bed mortar for AAC, ALC and cellular concrete blocks.

Substrates

- AAC Blocks
- Cement Mortar Blocks/Bricks
- Concrete hollow blocks
- Light weight masonry blocks
- Cellular concrete blocks
- Fly Ash Bricks
- Calcium silicate bricks
- Clay Bricks

Certification

IS 2250

ASTM C 1660, & C 270

Member of
Indian Green Building Council



TECHNICAL DATA

Performance Properties:

AAC Block Adhesive mixed with Water

Applicable Standards:

ASTM C 1660, ASTM C 270, IS 2250

ASTM C 1660 Data		
Property: Test Method	Requirement	Typical Values
Splitting Tensile Strength: Test Method ASTM C1660	58 -71 psi (0.40 – 0.49 MPa)	50 – 70 psi

The adhesive mortar conforms to ASTM C 1660

ASTM C 270 Data		
Property: Test method	Requirement	Typical Values
Compressive Strength: ASTM C109	Minimum 750 psi (5.2Mpa)	850-950 psi
Water Retention: ASTM C1506	Minimum 75%	85%-90%
Air Content: ASTM C91	Maximum 14%	10%-12%

The Adhesive mortar conforms to ASTM C 270

IS 2250 Data		
Property: Test Method	Requirement	Typical Values
Compressive Strength: Appendix A	5.0-7.5 MPa	5.5 – 6.5 MPa
Consistency: Appendix B	130-150 mm	135-145 mm
Water Retention: Appendix C	Minimum 70%	85%-90%

The adhesive mortar conforms to IS 2250

Specifications subject to change without notification.

Results shown are typical but reflect test procedures used. Actual field performance will depend on installation methods and site conditions.

Packaging:

40kg bag

Appearance:

Free flowing powder

Colour:

Grey

Coverage:

The following is the coverage table for **wall area in square feet** that can be constructed using AAC Blocks of size 600mm X 200mm X 100mm

Mortar Bed Thickness	Coverage for 40 kg bag
2 mm	240 Sft
3 mm	160 Sft
4 mm	120 Sft

Coverage is based on smoothness and evenness of the substrate, size of blocks used, and the thickness of mortar used. A general guideline for coverage of mortar is given when used with 30% Water is added to powder.

Working Properties at 70° F (21° C)

AAC Block Adhesive mixed with Water

Pot life

3 hours

Hard Dry

24 Hours

Shelf life

Factory sealed containers of this product are guaranteed to be of first quality for (1) year * If stored off the ground in a dry area

. *High humidity will reduce the shelf life of bagged product

INSTALLATION

Surface Preparation:

All surfaces should be between 40°F (4°C) and 90°F (32°C) and structurally sound, clean and free of all dirt, oil, grease, concrete sealers or curing compounds. Rough or uneven concrete surfaces should be made smooth with MYK LATICRETE Latex Portland Cement underlayment to provide a wood float (or better) finish. Installation may be made on a damp surface.

All slabs must be plumb and true to within 1/4" (6mm) in 10 ft (3m).

Follow ANSI Specification AN-3.8 "Requirements for Expansion Joints" or TCA Detail EJ171 "Expansion Joints".

Do not cover expansion joints with mortar.

NOTE: In order to realize all the product advantages, for high quality construction and best performance, it is necessary to follow the AAC Block Manufacturer's

instructions or IS 6041 or other relevant codes and good practices.

Mixing:

Use approx. 40kg of AAC Block Adhesive thin bed mortar with Approx. 11 to 11.6 ltrs of potable water. Take water in the container and slowly add the powder into the water while mixing by hand or slow speed mixing machine. Mix for 3 to 5 minutes till a smooth thixotropic mix without lumps is obtained.

APPLICATION:

Block mortar for laying blocks:

Before placing mortar, ensure the block work to be dry and surfaces cleaned properly. Place the mixed mortar on the block work in thin layers of 2 to 3 mm (or as required by engineers at site) using trowel and place the next layer of blocks on the mortar. Keep joints between the blocks as required by the site engineers and fill the joints with the mixed mortar, using a trowel. Check the plumb of the wall while laying the blocks to keep the walls perfectly vertical to the plumb.

Provide bond beams as suggested by the design engineer at site, which reduce the incidence of cracks in the block work during service periods.

Plaster:

Plumb, square and true concrete block wall can be finished with the applications of Special polymer plaster from MYK Laticrete.

Plasters made with site mix may slump and powder due to water absorption of the block work.

Cleaning:

Clean tools and containers with water while mortar is fresh.

NOTES: It is recommended to plaster the surface of AAC block walls and cure as per the standards before installation of tiles or stones over the walls. We do not recommend installing tiles and stones directly over the surface of AAC block walls.

CUSTOMER CARE

MYK LATICRETE India Pvt Ltd.

Plot No. 30/C (Sy. No. 83/1), Orbit Building,
17th Floor, Tower 1, Knowledge City, TSIC,
Raidurg, Ranga Reddy Dist.,
Hyderabad - 500 081, Telangana, INDIA.
Tel: +91-40-6817 3100
e-mail: cc@myklaticrete.com
Website: www.myklaticrete.com