


IVIYK LATICRETE

Commercial Floor Systems



- High strength, shock and improved impact resistant
- Permanent, problem free installation
- Low maintanence with maximum durability
- For heavy traffic areas such as malls, lobbies, airports, plazas, hospitals etc

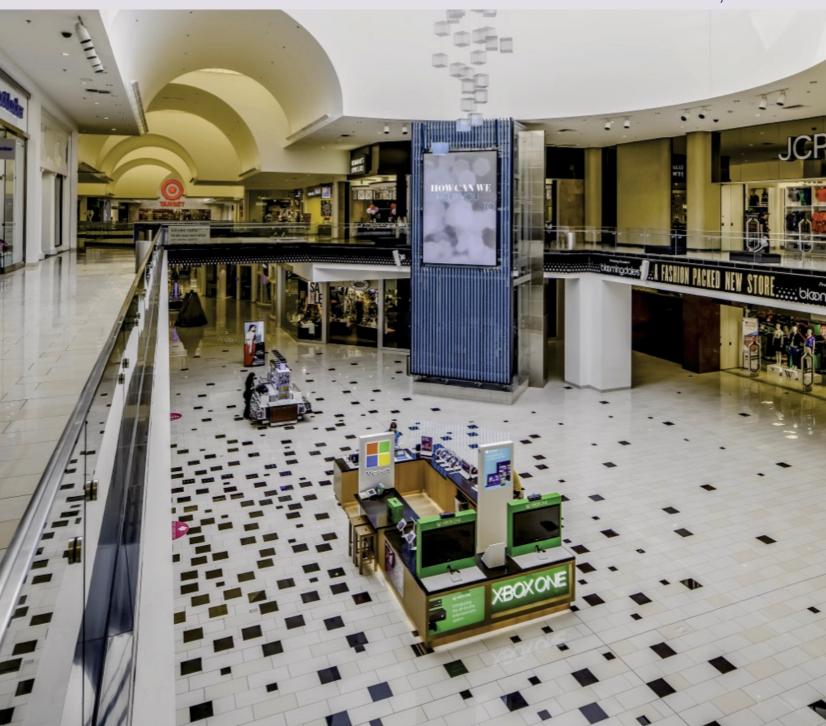



MYK LATICRETE COMMERCIAL FLOOR SYSTEM

MYK LATICRETE Commercial Floor Sysem is composed of high performance installation materials such as adhesives, underlayments, mortars and grouts. These systems provide permanent and problem free installations for various types of tiles and stones

Product recommendations:

| Area of installation | Product recommended |
|-----------------------------------|--|
| Floor screed | LATASCREED® 100 |
| Adhesive for fixing Tiles / Stone | For fixing tiles: LATICRETE® 325 High Flex Ag "SILVER" Tiles For fixing stones: LATICRETE® 320 Thick Bed Adhesive |
| Joint Filling | SP-100 [™] Stainfree Grout |
| Stone Care Products | Back coat : LATICRETE® 190 Sealer — to be applied on bottom surface and four edges of the tile / stone before fixing |
| Top Surface | MaxiSeal / MaxiSeal Plus — to be applied on top surface of stone after fixing |











Advantages:

LATASCREED® 100

- Self Curing and high strength
- · No cracking and settlement of screed.
- Slurry bond adhesive SBA 20
- · Single component, just add water.
- · Free flowing eliminates trowelling
- High strength, polymer fortified.

LATICRETE® 325 High Flex Ag "SILVER" Tile Adhesive

- · Flexible, single component Adhesive
- Highly polymer modified.
- · Shock and impact resistant.

LATICRETE® 320 Thick Bed Adhesive

- Suitable for interior & exterior floor application
- · Can be used from upto 40 mm thick bed
- High bond strength Supports heavy stones / Slabs

LATICRETE® 190 Sealer

- Water repellent
- Protects the stone from staining
- Easy to use


MaxiSeal / MaxiSeal Plus

- · Stain resistant
- · Retains natural look of the stone
- UV transparent

SP-100™ Stainfree Grout

- Stainfree
- Chemical resistant
- · Non cracking and non powdering
- Resistant to mold mild dew and chemical cleaners

INSTALLATION OF VITRIFIED TILE ON INTERNAL FLOOR SCREED BY THIN SET METHOD

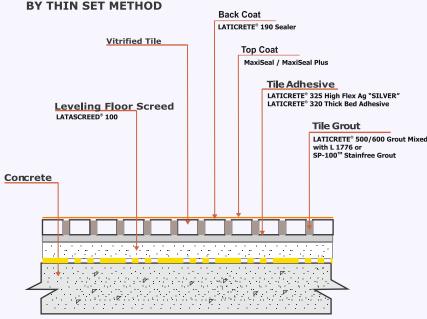

MYK LATICRETE INDIA PVT. LTD.,

Registered Office: 8-2-703/A, 4th Floor, Leela Gopal Towers, Road No. 12, Banjara Hills, Hyderabad - 500 034
Ph: +91-40-6817 3100 e-mail: contact@myklaticrete.com www.myklaticrete.com CIN: U99999TG1999PTC031624

Regional Offices: Ahmedabad: 093775 32991 | Bengaluru: 080-2675 7961 | Bhubaneswar: 090780 85131 | Chennai: 044-4351 8843 | Coimbatore:0422-264 4485 | Dehradun: 0135-3570 822 | Ghaziabad: 093506 21097 | Indore: 093015 32851

| Jaipur: 093510 02315 | Kochi: 0484 -247 7113 | Kolkata: 096810 75242 | Lucknow : 0522-402 4125 | Ludhiana: 0161-250 3686 | Mumbai: 022-2639 7453 | Nagpur: 098225 71318 | New Delhi: 011-430 20146 | Panchkula: 0172-503 3818 | Pune: 020-2421 3394

|Vijayawada: 9396707764 | Visakhapatnam: 0891-319 5577.



